
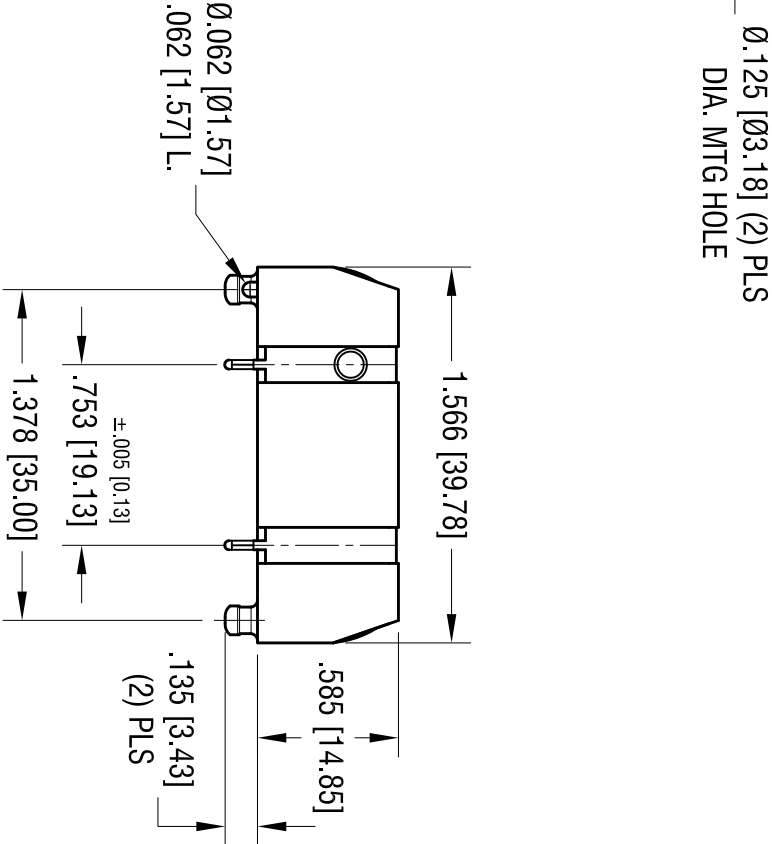
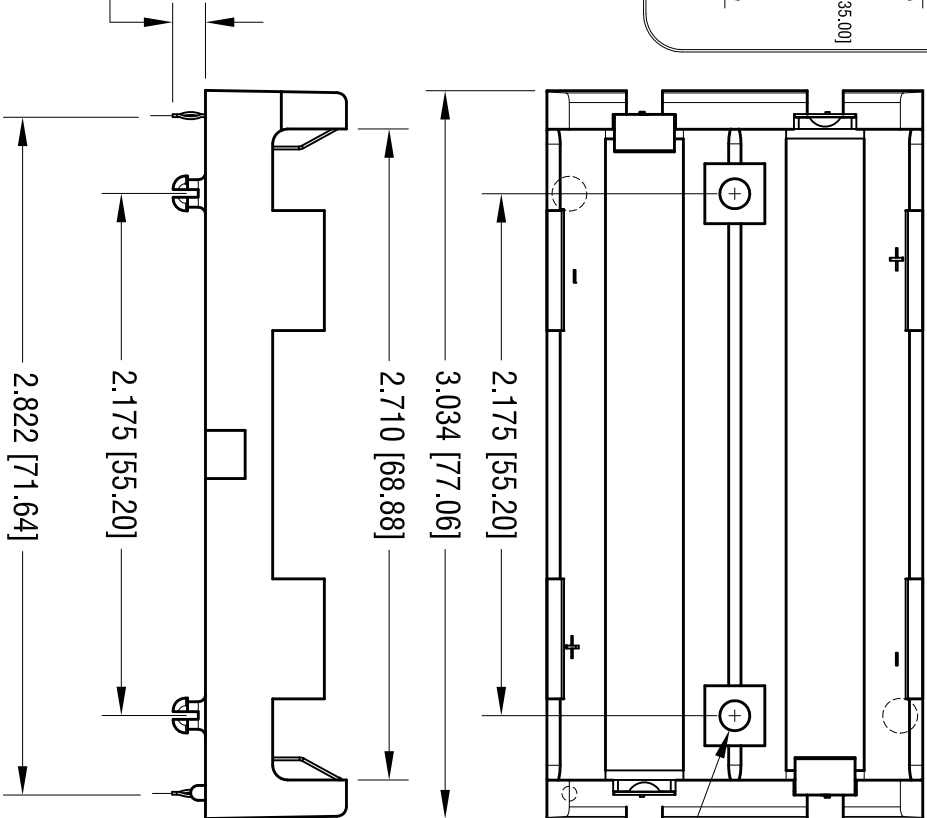
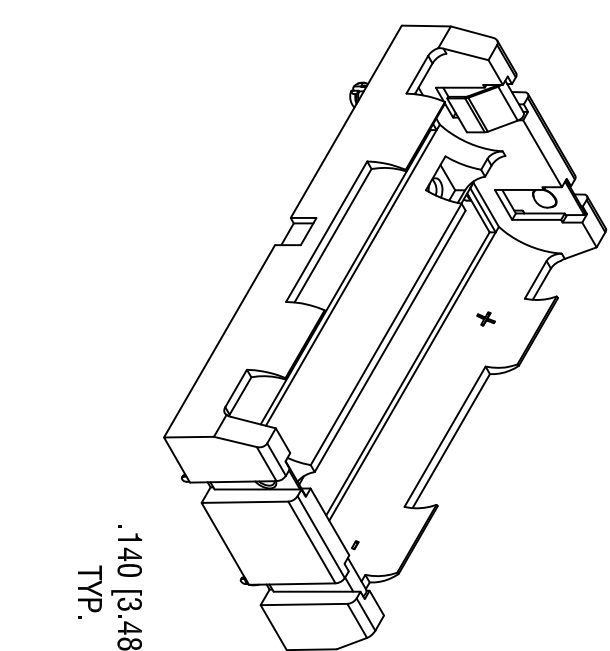


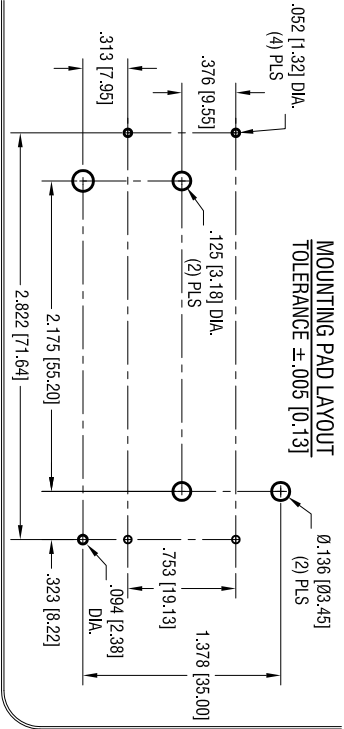

- NOTE:
1. BASE:
MAT'L: HEAT RESISTANCE NYLON
STANYL 46 OR EQUIVALENT
 2. CONTACT:
MAT'L: .012 [0.30]THK STAINLESS STEEL
FINISH: TIN NICKEL PLATE

DATE	DESCRIPTION	REV.
10.08.13	CHANGE AS PER ECN 13-091	A

0.125 [Ø3.18] (2) PLS
DIA. MTG.HOLE

1.566 [39.78]

0.062 [Ø1.57]
.062 [1.57] L.

±.005 [0.13]

.753 [19.13]

1.378 [35.00]

.585 [14.85]

.135 [3.43]
(2) PLS

KEYSTONE ELECTRONICS CORP.
www.keystec.com • ASTORIA, N.Y. 11105-2017 • Tel (718) 956-8900

PART NAME
DUAL THM BATTERY HOLDER

MATERIAL
AS NOTED

FINISH
AS NOTED

TOLERANCES INCH [MM]
DECIMAL ± .010 [± 0.25]
ANGULAR ± 1°

CODE C

DWG NO. 1049P

DRN BY NT
DATE 7.15.13
APPD LN
SCALE 1.25X

THIS DOCUMENT IS THE PROPERTY OF KEYSTONE ELECTRONICS CORP. AND SHALL NOT BE REPRODUCED, DISTRIBUTED OR USED AS A BASIS FOR MANUFACTURE WITHOUT PRIOR WRITTEN PERMISSION FROM KEYSTONE ELECTRONICS CORP.