
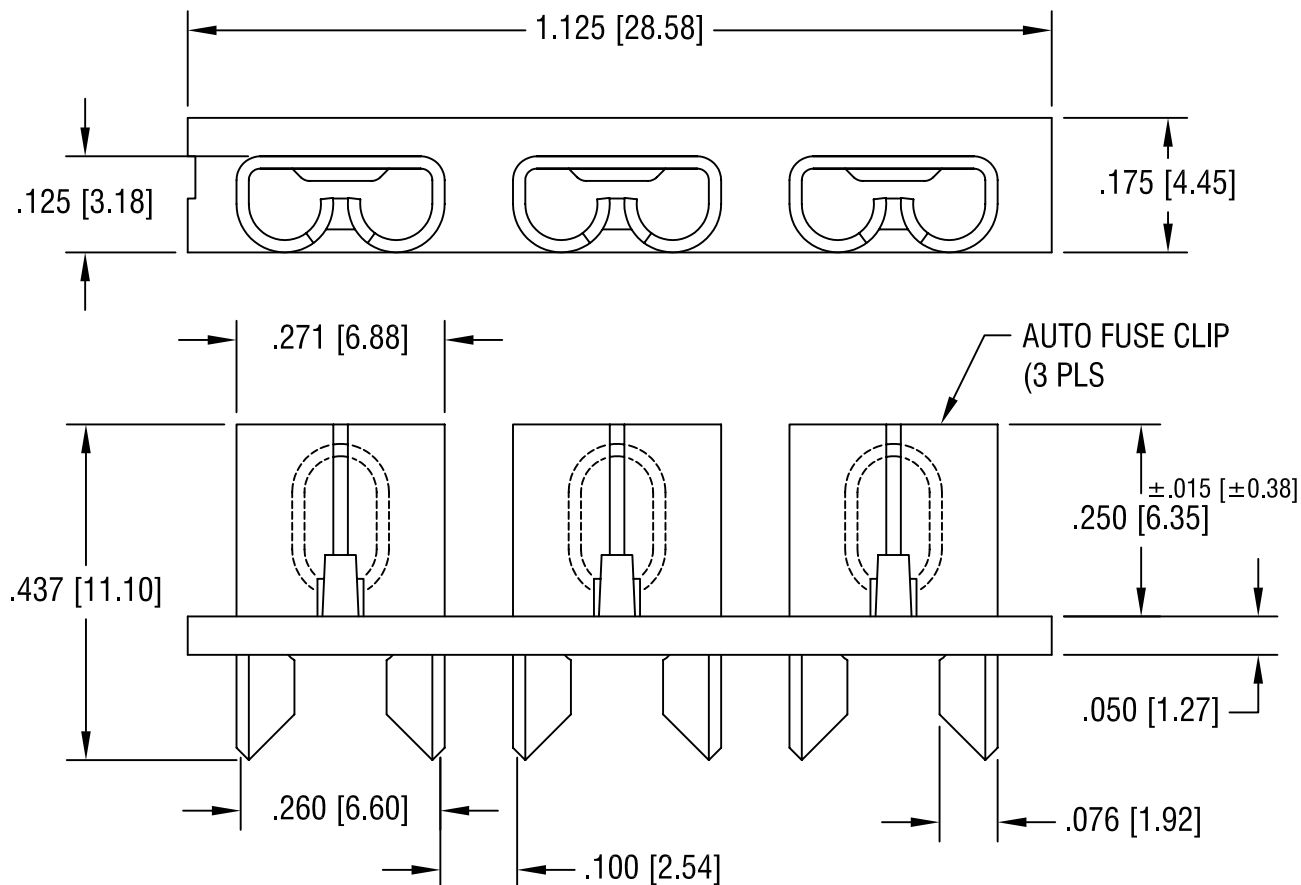


THIS DOCUMENT IS THE PROPERTY OF
KEYSTONE ELECTRONICS CORP. AND
SHALL NOT BE REPRODUCED, DISTRIBUTED
OR USED AS A BASIS FOR MANUFACTURE
WITHOUT PRIOR WRITTEN PERMISSION
FROM KEYSTONE ELECTRONICS CORP.

MOUNTING LAYOUT

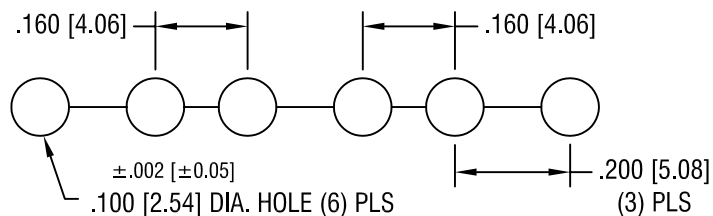

NOTE:

CLIP: .016 [0.40] TH'K BRASS, TIN NICKEL PLATE
BASE: MAT'L: GLASS FILLED NYLON, UL 94V-0
CURRENT RATING: 30 AMPS
VOLTAGE RATING: 500VAC
TEMPERATURE RATING: -58°F TO +292°F
(-50°C TO +145°C)

KEYSTONE ELECTRONICS CORP.

ASTORIA, N.Y. 11105-2017

PART NAME

PC AUTO FUSE SOCKET

MATERIAL

AS NOTED

FINISH

AS NOTED

DRN BY

BOONE

DATE

4.3.92

APP'D

LN

SCALE

4X

TOLERANCES

INCH

[MM]

DECIMAL

±.005

[±0.15]

ANGULAR

± 1°

UNLESS OTHERWISE SPECIFIED

CODE

C

DWG NO.

3522-3

8.18.06

CHANGE AS PER ECN 06-047

D

9.21.04

CHANGE AS PER ECN 04-122

C

DATE

DESCRIPTION

REV.